



DG Series

Regulators - Pressure Reducing

DDGXX1969X012

Specifications

For other materials or modifications, please consult TESCOM.

OPERATING PARAMETERS

Pressure rating per criteria of ANSI/ASME B31.3

Maximum Inlet Pressure

300 psig / 20.7 bar

Outlet Pressure Ranges

0-20, 0-50, 0-100, 0-150 and 0-250 psig
0-1.4, 0-3.4, 0-6.9, 0-10.3 and 0-17.2 bar
(0-300 psig / 0-20.7 bar dome load only)

Design Proof Pressure

150% maximum rated

Leakage

Bubble-tight

Operating Temperature

-10°F to 165°F / -23°C to 74°C

Flow Capacity

$C_v = 10$



MEDIA CONTACT MATERIALS

Body, Bonnet, Back-cap

316 Stainless Steel

Main Valve Seat

Buna-N 90, Ethylene Propylene 80, Chemraz 75® or Viton®

O-Rings

Buna-N, Ethylene Propylene 80, Chemraz 75® or Viton®

Diaphragm

Gylon®

Remaining Parts

300 Series Stainless Steel, Nitronic 60

OTHER

Cleaning

CGA 4.1 and ASTM G93

Weight

35 lbs / 15.9 kg

Viton® is a registered trademark of E.I. du Pont de Nemours and Company.

Gylon® is a registered trademark of Garlock, Inc.

Chemraz® is a registered trademark of Greentweed.

TESCOM DG Series single-stage regulator provides a compact size with high flow capability greater than 1000 SCFM / 28,300 SLPM. The large diaphragm and balanced main valve design provide lower droop (larger usable flow range) than competitive designs. Available in spring or dome loaded configurations.


Applications

- Purging, blanketing, high flow inerting, heat-treating and shielding gases
- Performs well at very low pressure differentials such as Dewar-supplied processes
- Multi-drop breathing air stations

Features and Benefits

- $C_v = 10$ in a compact design
- Diaphragm sensing provides greater accuracy and sensitivity
- Dome/air actuated compatible with TESCOM ER3000 Electropneumatic Controllers


DG Series Regulator Drawing

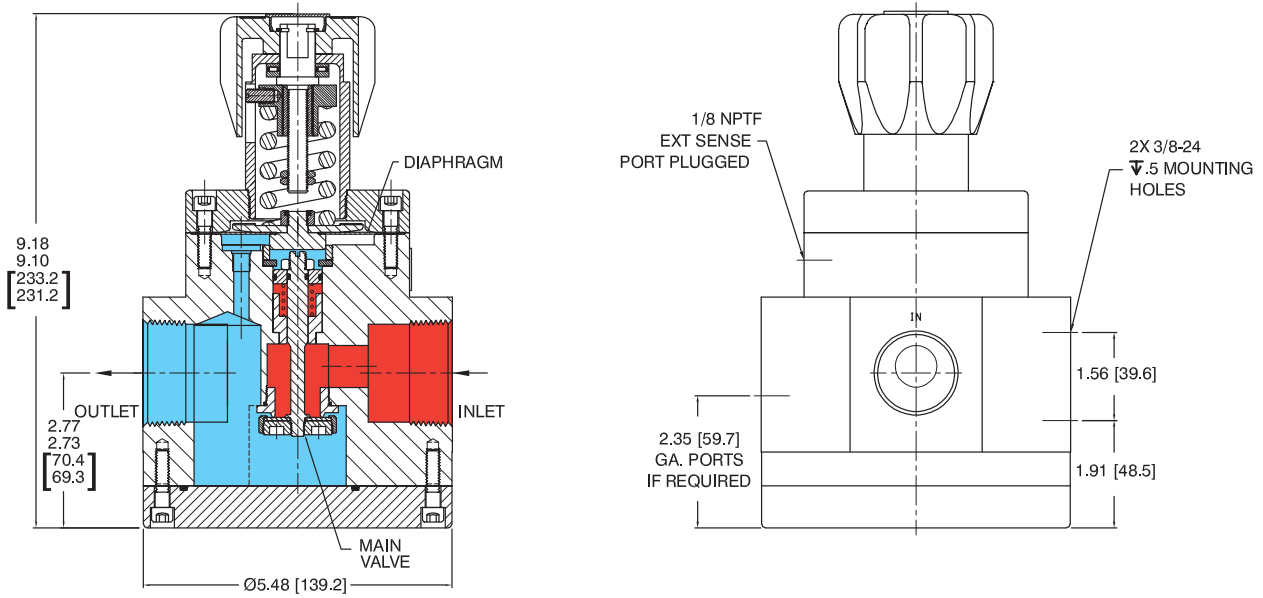

All dimensions are reference & nominal
Metric [millimeter] equivalents are in brackets

DG Series Regulator Flow Chart

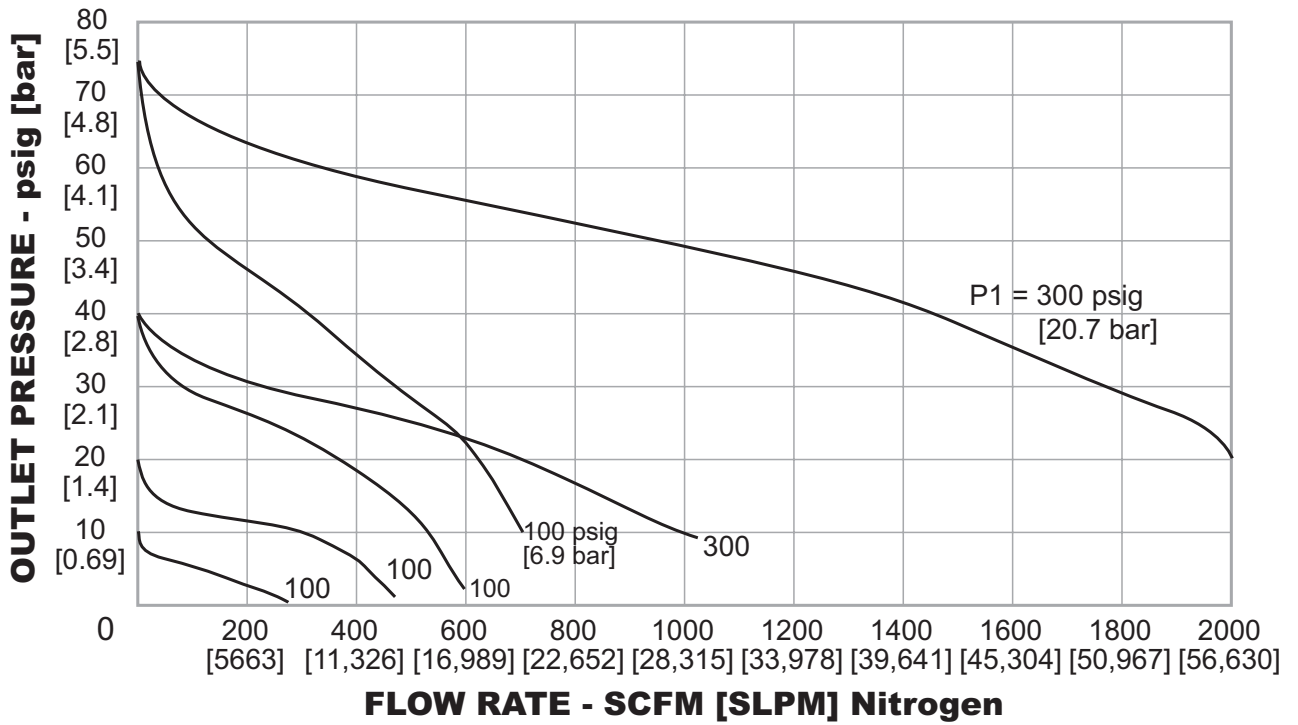


For more information on how to read flow curves, please refer to the Flow Curves and Calculations document (debul2007x012) in the TESCOM catalog or on www.tescom.com.



DG Series Regulator Part Number Selector

Repair Kits, Accessories & Modifications may be available for this product. Please contact TESCOM for more information.

Example for selecting a part number:

BASIC SERIES	LOAD TYPE	BODY, BONNET, BACK-CAP MATERIAL	OUTLET PRESSURE RANGES	SOFT GOODS		DIAPHRAGM	VENT SEAT	OPTIONAL	PORT TYPE	PORT SIZE	PORTING
				O-RING	VALVE SEAT						
DG	D – Dome Load H – Spring Load	6 – 316 Stainless Steel	0 – 0-20 psig 0-1.4 bar 1 – 0-50 psig 0-3.4 bar 2 – 0-100 psig 0-6.9 bar 3 – 0-150 psig 0-10.3 bar 5 – 0-250 psig 0-17.2 bar D – 0-300 psig 0-20.7 bar (Dome load only)	B – Buna-N E – Ethylene Propylene M – Chemraz® V – Viton®	Buna-N 90 Ethylene Propylene 80 Chemraz 75® Viton®	G – Gylon®	N – Non-venting	C – CCL 9 – None	2 – NPTF	16 – 1" 24 – 1-1/2"	A – No gauge ports  C – Two gauge ports at 70°  D – One gauge port at 90° 



Schlossgasse 10 CH-4125 Riehen Tel.: +41 61 645 98 00 email: info@zimmerliag.com www.zimmerliag.com



WARNING! Do not attempt to select, install, use or maintain this product until you have read and fully understood the TESCOM Safety, Installation and Operation Precautions.

DDGXX1969X012 © 2014 Emerson Process Management Regulator Technologies, Inc. All rights reserved. 09/2014.
Tescom, Emerson Process Management, and the Emerson Process Management design are marks of one of the Emerson Process Management group of companies. All other marks are the property of their respective owners.